


The Inception Express Controller is a powerful, unified security system that brings together Intruder Detection, Video Surveillance and Access Control into one easy to use web-based hardware solution.

With Inception Express, there is no need to install software on a computer, no need to leave a computer on site and no issues with software/firmware compatibility. Instead, the installation process is as simple as powering up the controller, connecting the network cable (or use the optional Wi-Fi adapter) and using any web browser to navigate to Inception Express web page. Here you will find everything you need to set-up, commission, and operate the entire system.

End users can conveniently use any existing computer, tablet, or smartphone to control their Inception Express system via the fully featured user interface.

The Inception Express controller can be expanded via the RS485 LAN allowing expansion of inputs, outputs and doors as well as having the ability to seamlessly connect with the IR Video range of video surveillance products.

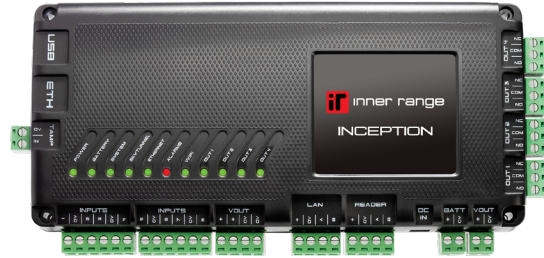

## Hardware Features

- Built-in web Interface
- 8 x Universal Zone Inputs - expandable up to 32
- 4 x Auxiliary Relay Outputs - expandable up to 32
- Manage up to 4 Doors via expansion modules
- Connect up to 8 SIFER readers via expansion modules
- RJ45 - 10/100 Ethernet Port RS-485 Sub-LAN Port
- USB Port for connection of Wi-Fi adapter & T4000 Alarm communicator

## System Capacities

	On-board Inception Express Controller	With LAN Expansion
<b>Inputs Wired</b>	8	32
<b>Areas</b>	4	4
<b>Users</b>	32	32
<b>Outputs</b>	4	32
<b>Events</b>	25,000	25,000
<b>Automated Actions</b>	32	32
<b>Notifiers</b>	4	4
<b>Doors</b>	0	4
<b>SIFER Readers</b>	0	8
<b>Wiegand Readers</b>	0	8
<b>Time Periods</b>	8	8

## Compatible Expansion Modules

Module / Device Description	Part Number
8 Input LAN Expander (UniBus Host)	996005PCB&K
UniBus 8 Input Expander	996500PCB&K
UniBus 8 Relay Expander	996515PCB&K
Standard LAN Access Module (SLAM)	996012PCB&K
Intelligent LAN Access Module (ILAM)	996018PCB&K
Paradox RF Expander	995025
Inovonics RF Expander	996008
EliteX Keypad	995400
7" Touchscreen Keypad (White /Black)*	S-TS7W / S-TS7B
SIFER Smart Card Reader	994720 / 994720MF
SIFER Keypad / Smart Card Reader	994725 / 994725MF
Mobile Access Keypad / Reader	994726 / 994723
OSDP<>Wiegand Converter	994200
T4000 Security Communicator	998530LT / 998530
LAN Over Ethernet Device (CLOE)	995093
LAN Isolator	995080
Fibre Modem (Single or Multi Mode)	995081 / 995087

\*Available March 2025



## Specifications

### Physical

Dimensions:	205 (L)x 95(W)x 36(D) (mm)
Case Material:	ABS plastic
Shipping Weight (gross):	1.2kg
Installation Environment:	0°C - 50°C @15% - 90% Relative humidity (non-condensing)

### Connections

Zone Inputs	8
Relay Outputs:	4
Relay Contact Rating:	5A 30V DC or AC

### Alarm Communications

Format:	Contact ID, IR Fast
Path:	T4000 Alarm Communicator, SkyTunnel (via Ethernet)

### Electrical

<b>Power Source:</b>	
- To "DC IN" (recommended):	18V to 24V DC 2.5A (e.g. the supplied 24V 2.5A PSU) Note: A 12V, SLA Battery of 7AH to 18AH capacity must be connected to BATT' input.
- To "BATT" (alternate method)	12.8V-14V DC 2.8A (e.g. a separate external battery-backed power supply)

Note: "DC IN" should not be connected when powered via the BATT connection

<b>Idle Current Consumption:</b>	
- DC IN: (24V DC):	60mA (85mA with Ethernet connected)
- BATT: (DC IN = 0V)	110mA (150mA with Ethernet connected) Note: Does not include battery charging or current required by devices.

<b>Additional Current Required For:</b>	
- Built-in Relays: (out 1 ~ out 4)	25mA per relay (33mA when Controller powered from "BATT" input)
- Inception WiFi Adapter:	25mA (40mA when Controller powered from "BATT" input)
- Inception 4-Port USB Hub:	20mA (40mA when Controller powered from "BATT" input) Note: Does not include current required by any device connected to a USB Port

<b>Power Supply Outputs:</b>	
- V OUT (4-PIN)	13.4V DC +/-150mV 1.5A max
- V OUT (2-PIN):	13.4V DC +/-150mV 1.5A max
- LAN +:	13.4V DC +/-150mV 350mA max
- READER +:	13.4V DC +/-150mV 1.1A max
- USB 2.0:	5V DC 500mA max
- Maximum Combined Current - All Outputs:	3 A max
Battery Charger Output	13.75V DC / Output Current: Up to 500mA

### Compliance

Electrical	
Environmental	

## Ordering Options



996300XPR Inception Express Controller