

## DS-PDPG12P-EG2



- PIR Detection Range: 12m / 85.9°
- Glass Break Range: 8m / 120°
- Up to 30KG pet immunity
- Selectable EOL resistors
- 9-16 VDC wide voltage adaptation with polarity reverse connection protection



## ▪ Specification


<b>Detection Performance</b>	
Detection Method	Passive Infrared,Acoustic Sensor
Detection Range	12 m
Detection Angle	85.9°
Detection Zones	52
Detectable Speed	0.3 ~ 2 m/s
Pet Immunity	30 Kg
White Light Filter	6500 lux
PIR Sensitivity	Auto, Pet
Glass Break Range	8 m
Glass Type	Float, Plate, Tampered, Wired, Laminated Leaded, Double Glazing
Glass Thickness	2.4 mm to 6.4 mm
Glass Break Sensitivity	Potentiometer Adjustment
Digital Temperature Compensation	Support
Glass Size	0.3 m x 0.3 m to 3 m x 3 m
Creep Zone Protection	Support
<b>Feature</b>	
Digital Processing	Support
Sealed Optics	Support
Tamper Protection	Front
<b>Interface</b>	
Alarm Output	Normally Closed
LED Indicator	Green(PIR), Red(BG), Blue(alarm)
<b>Transmission</b>	
Transmission Method	Wired
<b>Electrical Characteristics</b>	
Power Consumption	36mA Max
Power Supply	9 to 16 VDC
Typical Voltage	12 VDC
<b>General</b>	
Operation Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Operation Humidity	10% to 90%
Dimension(W × H × D)	65.5 mm × 103 mm × 48.5 mm
Weight	98.5 g
Mounting Height	1.8 to 2.4 m
Mounting Method	Wall
Application Scenario	Indoor
Bracket	Optional Wall & Ceiling Accessory

▪ **Available Model**


DS-PDPG12P-EG2

▪ **Installation**

**Choose the right location**

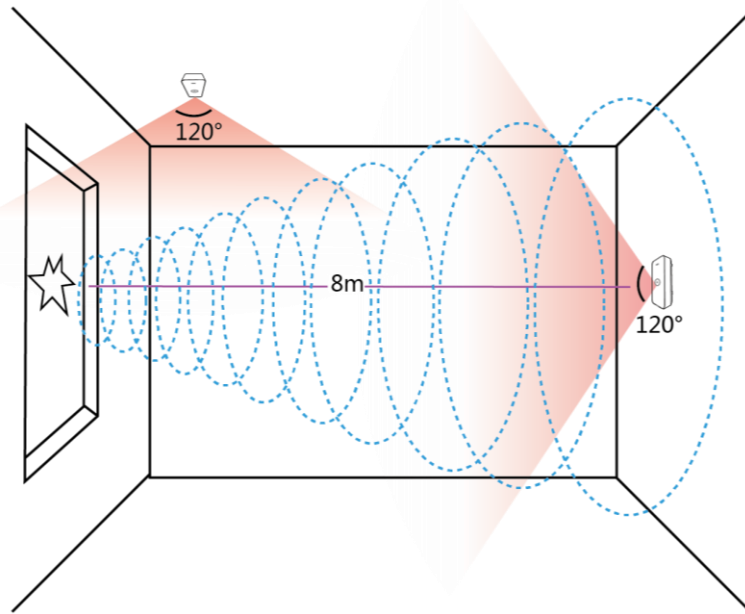

**Properly test the detector after installation**

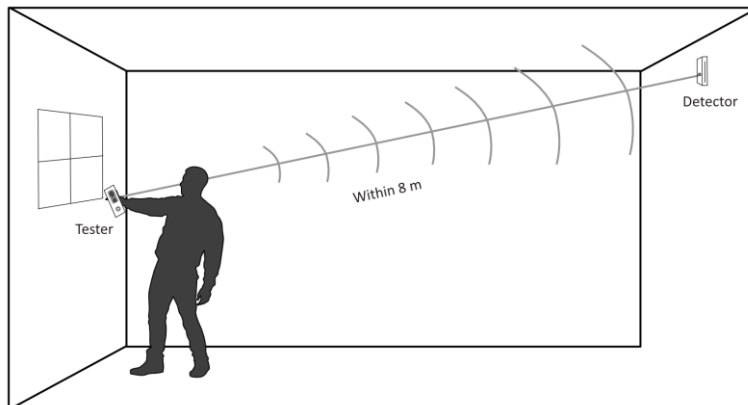

**Note:**

You should use the matching tester.

**Warning:**

1. Avoid mounting the detector on the same wall as the protected glass.
2. Avoid mounting the detector in rooms with noisy equipment (air compressors, power tools, bells, etc.)
3. Avoid mounting the detector in humid rooms (bathroom, etc.)
4. Avoid mounting the detector on the wall with strong vibration.

- **Accessory**
- **Optional**

**DS-PDB-IN-Universal bracket**

**Internal universal bracket**



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com