


SMARTRAK® 2.0

COST EFFECTIVE, EFFICIENT
AND RELIABLE
SERVER RACK SYSTEM



DATA CENTERS
LOCAL AREA NETWORK
APPLICATIONS



THE GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES





SMARTRAK® 2.0

Cost effective
Assemble friendly
Flat-packed for shipping



Smartrak® 2.0 is an improved multi-purpose rack system that is scalable and flexible for all kinds of Data Center and Lan applications.


The cabinet is strong and versatile for large cable management from top or bottom.



Heavy duty castor wheels with adjustable feet



Robust swing handle lock set



Fan tray (Annex A)



Cable Tray(Annex B)

FEATURES

- Static load rating of 1200KG.
- Full height door for better ventilation.
- 3 times bend panel mounting for a stronger structure.
- Save assembly time with flat packs with the new simplified design with lesser parts to fix.


ORDERING INFORMATION

SmartRak 2.0 Part Number Table for a Fully assembled racks (Black)										
Height	Width & Depth									
"U"	600 x 600	600 x 800	600 x 1000	600 x 1100	600 x 1200	800 x 600	800 x 800	800 x 1000	800 x 1100	800 x 1200
27U	SR27606BVA	SR27608BVA	SR27610BVA	SR27611BVA	SR27612BVA	SR27806BVA	SR27808BVA	SR27810BVA	SR27811BVA	SR27812BVA
32U	SR32606BVA	SR32608BVA	SR32610BVA	SR32611BVA	SR32612BVA	SR32806BVA	SR32808BVA	SR32810BVA	SR32811BVA	SR32812BVA
36U	SR36606BVA	SR36608BVA	SR36610BVA	SR36611BVA	SR36612BVA	SR36806BVA	SR36808BVA	SR36810BVA	SR36811BVA	SR36812BVA
42U	SR42606BVA	SR42608BVA	SR42610BVA	SR42611BVA	SR42612BVA	SR42806BVA	SR42808BVA	SR42810BVA	SR42811BVA	SR42812BVA
45U	SR45606BVA	SR45608BVA	SR45610BVA	SR45611BVA	SR45612BVA	SR45806BVA	SR45808BVA	SR45810BVA	SR45811BVA	SR45812BVA
47U	SR47606BVA	SR47608BVA	SR47610BVA	SR47611BVA	SR47612BVA	SR47806BVA	SR47808BVA	SR47810BVA	SR47811BVA	SR47812BVA



Annex A

SMARTRAK 2.0 FAN TRAY KIT		
ITEM	Part Number	Description
1	SR_FTA_0600_0002	FAN TRAY ASSEMBLY (600D x 2 FANS) C13 INPUT+ C13~C14 CORD (2m)
2	SR_FTA_0800_0003	FAN TRAY ASSEMBLY (800D x 3 FANS) C13 INPUT+ C13~C14 CORD (2m)
3	SR_FTA_1000_0004	FAN TRAY ASSEMBLY (1000D x 4 FANS) C13 INPUT+ C13~C14 CORD (2m)
4	SR_FTA_1100_0004	FAN TRAY ASSEMBLY (1100D x 4 FANS) C13 INPUT+ C13~C14 CORD (2m)
5	SR_FTA_1200_0004	FAN TRAY ASSEMBLY (1200D x 4 FANS) C13 INPUT+ C13~C14 CORD (2m)

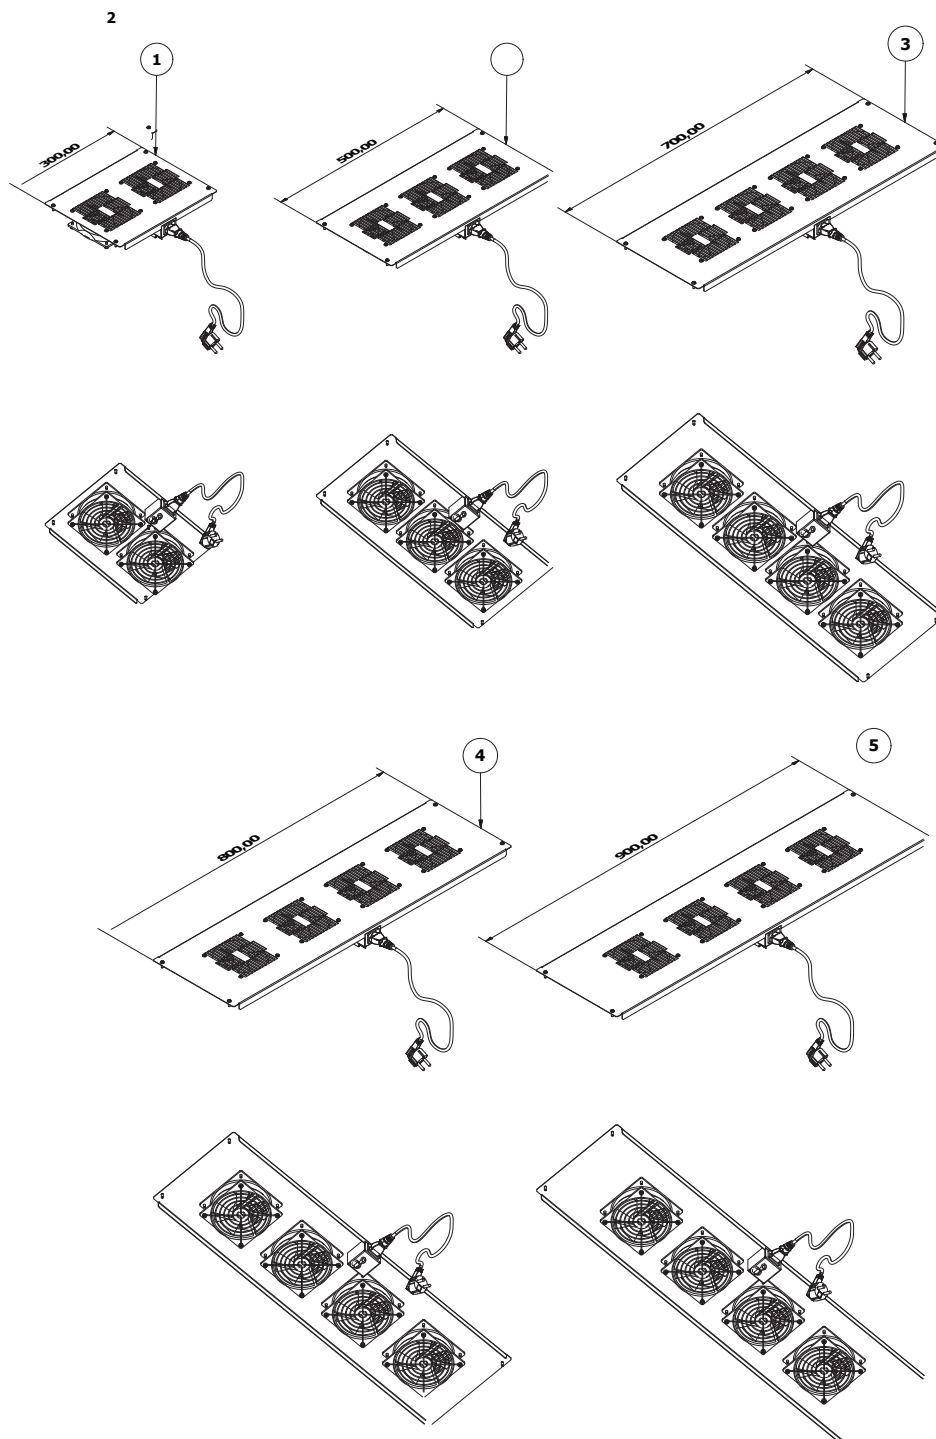


More information?


More information about SJ or Legrand products can be found in several brochures which can be downloaded from the websites.



www.legrand.com

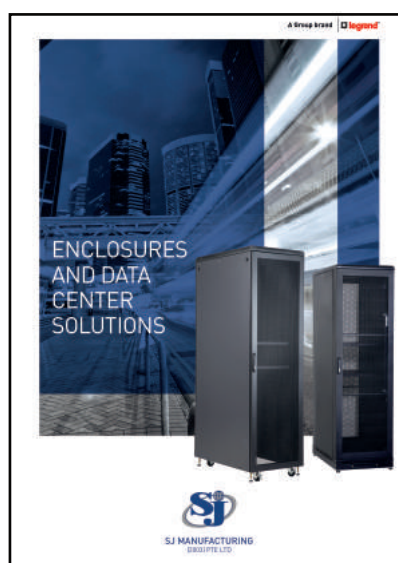

www.legrand.com.sg

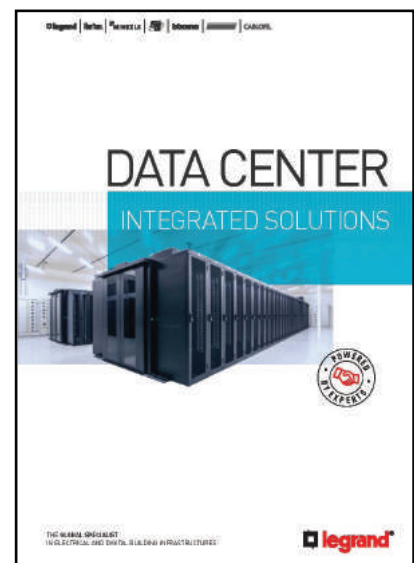

www.legrand.com.sg

Contact Us

SJ Manufacturing (Vietnam) Co., Ltd
02, C1-1/X7, D4 Street, Tan Phu
Trung IP, Tan Phu Trung Ward,
Cu Chi, HCMC
Tel: (+84)8 3892 2334
(+84)8 3892 2335
Fax: (+84)8 3892 2346
Email: sales-viet@sjmfg.com.sg



<https://www.facebook.com/LegrandVNofficial>
<https://www.facebook.com/SJ.Racks/>

SEA 18F01 Nov18

Annex B

SMARTRAK 2.0 CABLE TRAY PART NUMBERS		
ITEM	Part Numbers	Description
1	SR_FCT_2700_0095_00	CABLE TRAY 27Ux95
2	SR_FCT_3200_0095_00	CABLE TRAY 32Ux95
3	SR_FCT_3600_0095_00	CABLE TRAY 36Ux95
4	SR_FCT_4200_0095_00	CABLE TRAY 42Ux95
5	SR_FCT_4500_0095_00	CABLE TRAY 45Ux95
6	SR_FCT_4700_0095_00	CABLE TRAY 47Ux95
7	SR_FCT_2700_0150_00	CABLE TRAY 27Ux150
8	SR_FCT_3200_0150_00	CABLE TRAY 32Ux150
9	SR_FCT_3600_0150_00	CABLE TRAY 36Ux150
10	SR_FCT_4200_0150_00	CABLE TRAY 42Ux150
11	SR_FCT_4500_0150_00	CABLE TRAY 45Ux150
12	SR_FCT_4700_0150_00	CABLE TRAY 47Ux150
13	SR_FCT_2700_0200_00	CABLE TRAY 27Ux200
14	SR_FCT_3200_0200_00	CABLE TRAY 32Ux200
15	SR_FCT_3600_0200_00	CABLE TRAY 36Ux200
16	SR_FCT_4200_0200_00	CABLE TRAY 42Ux200
17	SR_FCT_4500_0200_00	CABLE TRAY 45Ux200
18	SR_FCT_4700_0200_00	CABLE TRAY 47Ux200

27 / 32 / 36 / 42 / 45 / 47 U

95 / 150 / 200 mm

SMARTRAK® 2.0 - Dimensions and mounting positions

Height (U)	H (mm)
------------	--------


27	1295
32	1517
36	1695
42	1962
45	2051
47	2140

Depth (mm)	P~P
------------	-----

600	340
800	530
1000	740
1100	740~840
1200	740~940

Width (mm)	W(mm)
------------	-------

600	600
800	800

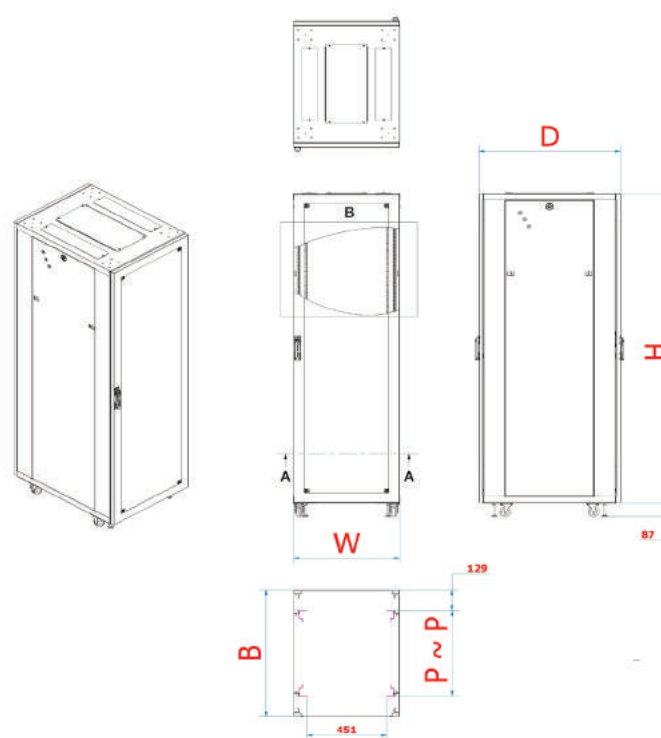

Standards

IEC 297-2
DIN 41494, part 7
DIN 41491, part 1 (mounting dimension)
EN 60950
VDE 0100
EIA-310-D
BS 5954-2 (Design and Conformance)
1U = 44.45mm

