

8 WIRE RS485 & POWER CONNECTION

- 9V DC, min 100mA
- 12V DC, min 80mA
- 18V DC, min 55mA
- 24V DC, min 40mA

9 MOUNT HUB

Position Hub maximum of 5m from lock

10 FINAL CHECK

WARRANTY

ASSA ABLOY Australia Pty Limited ("ASSA ABLOY") warrants its Aperio products against defects in workmanship and materials, subject to the limitations and exclusions set out in this Warranty.

If, within the normal working life of a product, it is found to be defective, and none of the limitations and exclusions set out in this Warranty apply, ASSA ABLOY will supply the same or equivalent product free of charge. This is the only remedy granted by ASSA ABLOY under this Warranty. Limitations: All electrical and electronic components used in ASSA ABLOY's Aperio range of products (excluding batteries) are guaranteed for a period of 24 months from the date of proof of purchase, unless stated otherwise.

Exclusions: This Warranty does not cover:

1. Damage to or malfunction or failure of the Aperio product caused or contributed to by: (a) improper installation or failure to follow fitting instructions; (b) improper maintenance; (c) fair wear and tear; (d) any modification or repair which has not been authorized by ASSA ABLOY; (e) use of substitute or replacement parts or cylinders other than genuine ASSA ABLOY parts or cylinders; or (f) use of batteries other than those specified by ASSA ABLOY.
2. The cost of: (a) removal and/or replacement of the Aperio product; (b) freight and/or travelling time; (c) replacement batteries; or (d) any modification or repairs to an Aperio product, unless authorised by ASSA ABLOY.
3. Damage caused by corrosion when the Aperio product is used in a corrosive environment.
4. Aperio products installed in an exterior environment.
5. Personal injury, property damage or economic loss, however caused.

This Warranty is in addition to and not in substitution for any rights of the purchaser under the Trade Practices Act and state or territory legislation.

ASSA ABLOY

E100 SERIES APERIO ESCUTCHEON INSTALLATION INSTRUCTIONS



FOR INTERNAL APPLICATIONS ONLY

ASSA ABLOY, the global leader in door opening solutions

P/No. 3572-E121 Iss. A

ASSA ABLOY Australia Pty Limited, 235 Huntingdale Rd, Oakleigh, VIC 3166 ABN 90 086 451 907 ©2010
The global leader in door opening solutions

ASSA ABLOY

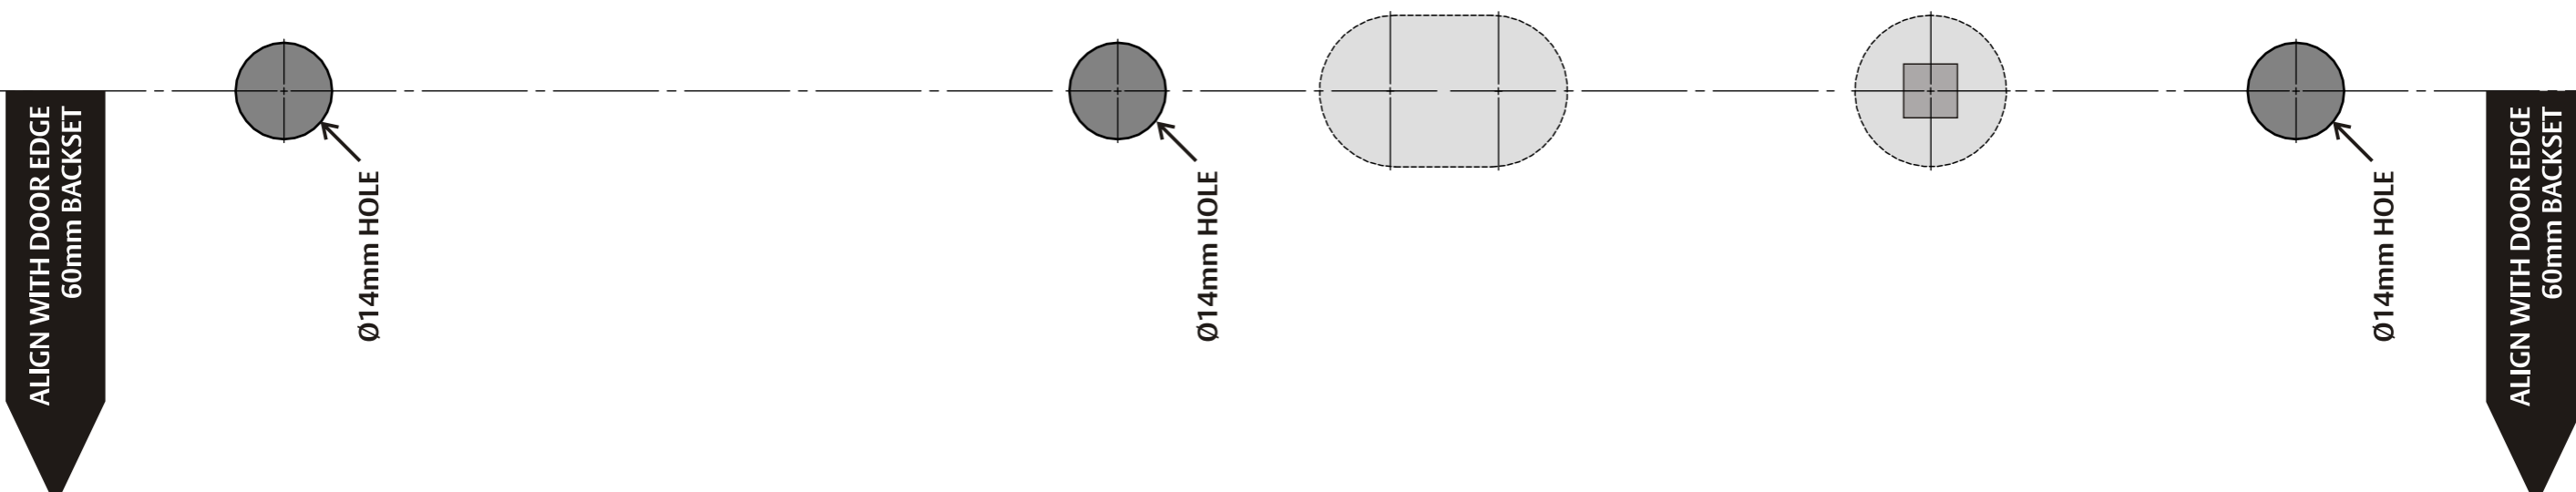

CONTENTS

1x
1x
1x
1x
3x
CR123

TOOLS REQUIRED

Ø14 mm

1 REMOVE MORTICE LOCK

**RECOMMENDED MORTICE LOCK
P/No. 3572SCNOHD**

2 MARK DOOR WITH TEMPLATE

Mark both sides

3 DRILL MOUNTING HOLES

Ø14
Ø14
Ø14

Drill both sides

4 MOUNT EXTERNAL PLATE

5 MOUNT & SECURE INTERNAL PLATE

6 INSTALL BATTERY

CR123

7 SECURE COVER PLATE AND LEVER

CUT HERE

