

# FreeSpace FS2P

## pendant loudspeaker

### Product Overview

FreeSpace FS loudspeakers are the next step of our widely trusted line of in-ceiling and surface-mount loudspeakers, offering significant upgrades in durability, design, and ease of installation — all with remarkably consistent tonality. Engineered for high-quality performance in both background music and voice announcement applications, FS loudspeakers are ideal for almost any commercial space. The line includes five loudspeakers, two distinct levels of sound, new mounting options, and a modern aesthetic to match. For those seeking consistent, quality installed sound, FreeSpace FS loudspeakers are the perfect mix of performance and value.

The FS2P is a dedicated pendant model with a full-range 2.25-inch transducer, low frequency range down to 83 Hz, and sensitivity of 87 dB SPL / 1 W @ 1 m.

**Product update:** New models are UL 1480A-certified. See the FS2P product page at [boseprofessional.com](https://www.boseprofessional.com) for details.



### Key Features

**Maintain consistent tonal quality** with shared voicing across all FS models

**Hear the best of both — music and voice** — with transducers that offer clear voice reproduction and smooth response for background music

**Customize systems with confidence** using in-ceiling, surface-mount, and pendant-mount options, allowing for tailored mix-and-match installations. DesignMax subwoofers and larger models can expand your system design options even further

**Blend with more room designs** with updated enclosures — available in black and white — that pair modern aesthetics with practical features, including removable logos

**Tackle site-specific challenges** with the support of a full suite of accessories, designed to handle a wide range of applications and mounting options

**Install with ease** — all models feature Euroblock inputs and front-baffle input location on in-ceiling models

**Support public safety** — EN54-24 for Voice Alarm Systems for Fire Detection and Fire Alarm Systems for Buildings

**Stylish pendant enclosure with single-point suspension**, perfect for open-ceiling applications or any installation requiring the aesthetic and performance capabilities of a pendant design

### Technical Specifications

SINGLE LOUDSPEAKER PERFORMANCE		
Frequency Response (-3 dB) <sup>1</sup>	95 – 16,000 Hz	
Frequency Range (-10 dB) <sup>1</sup>	83 – 19,000 Hz	
Nominal Coverage Angle (1 – 4 kHz)	140°	
Nominal Coverage (1 – 10 kHz)	130°	
	<b>AES transducer test<sup>4</sup></b>	<b>Bose Professional extended-lifecycle test<sup>5</sup></b>
Power Handling, Long-term Continuous	20 W	16 W
Power Handling, Peak	80 W	64 W
Sensitivity SPL / 1 W @ 1 m <sup>2</sup>	87 dB	87 dB
Calculated Maximum SPL @ 1 m <sup>3</sup>	100 dB	99 dB
Calculated Maximum SPL @ 1 m, Peak	106 dB	105 dB

For additional specifications and application information, please visit [BoseProfessional.com](https://www.boseprofessional.com). Specifications subject to change without notice. 09/2024

## TECHNICAL DATA

# FreeSpace FS2P

## pendant loudspeaker

Loudspeaker EQ	No Bose Professional EQ required when speaker used for general use. Bose Professional EQ Voicing and SmartBass available. EN54-24 equalization is required for EN54-24 use; refer to installation guide for details.
Recommended High-Pass Protection	85 Hz with minimum 24-dB/octave filter
Transformer taps	70V: 1, 2, 4, 8, 16 W, bypass
	100V: 2, 4, 8, 16 W, bypass
<b>TRANSDUCERS</b>	
Full-Range Driver	1 × 2.25-inch woofer (57 mm)
Nominal Impedance	16 ohms (transformer bypass)
<b>PHYSICAL</b>	
Enclosure Material	Engineered plastics
Grille	Perforated steel, powder-coated finish
Logo	Removable
Color	Black (similar to RAL 9005), White (similar to RAL 9003)
Environmental	Indoor only
Safety Agency	Certification: EN 54-24: 2008 for Voice Alarm Systems; UL 1480(A). For EN 54-24 specifications, refer to the installation guide. EN 54-24 equalization required for EN 54-24 use. Installation: NFPA 70, NFPA 72, CSA C22.1 Section 32.
Operating Temperature Range	0 °C to 50 °C (32 °F to 122 °F)
Connectors	Euroblock 6-pin connector with loop-through, mounted on top. Accepts 18 AWG (0.8 mm <sup>2</sup> ) to 14 AWG (2.5 mm <sup>2</sup> ) size wire. Includes input cover.
Suspension/Mounting	Each FS2P has one (1) suspension attachment point and one (1) safety cable attachment point. Included is one (1) 4.5 m (15 ft) adjustable pendant suspension cable.
Product Dimensions (Enclosure Diameter × Depth)	149 × 183 mm (5.9 × 7.2 in)
Product Dimensions with Suspension Cable Attachment Point (Enclosure Diameter × Depth)	149 × 215 mm (5.9 × 8.5 in)
Net Weight, Loudspeaker with Grille (Single)	1.47 kg (3.25 lb)
Shipping Weight (Pair)	4.06 kg (8.95 lb)
Included Accessories	Each FS2P includes one (1) 4.5 m (15 ft) adjustable pendant suspension cable, four (4) cable ties, one (1) input cover and one (1) safety cable attachment.
Optional Accessories	Pendant suspension cable kit (2-pack), ceramic terminal and fuse kit (10-pack)
<b>PRODUCT CODES</b>	
Black, UL 1480	841153-0310 FREESPACE FS2P PAIR BLK
Black, UL 1480A	841153-0320 FREESPACE FS2P PAIR BLK
White, UL 1480	841153-0410 FREESPACE FS2P PAIR WHT
White, UL 1480A	841153-0420 FREESPACE FS2P PAIR WHT

### Footnotes


1. Frequency response and range measured on-axis in whole-space environment with recommended EQ.
2. Sensitivity measured on-axis in whole-space environment averaged 100 Hz – 10 kHz using recommended high-pass protection.
3. Maximum SPL calculated from sensitivity and power handling specifications, exclusive of power compression.
4. AES standard 2-hour duration with IEC system noise.
5. Bose Professional extended-lifecycle test using pink noise filtered to meet IEC268-5, 6-dB crest factor, 500-hour duration.

For additional specifications and application information, please visit [BoseProfessional.com](https://www.boseprofessional.com). Specifications subject to change without notice. 09/2024


# FreeSpace FS2P

pendant loudspeaker


## On-axis Response

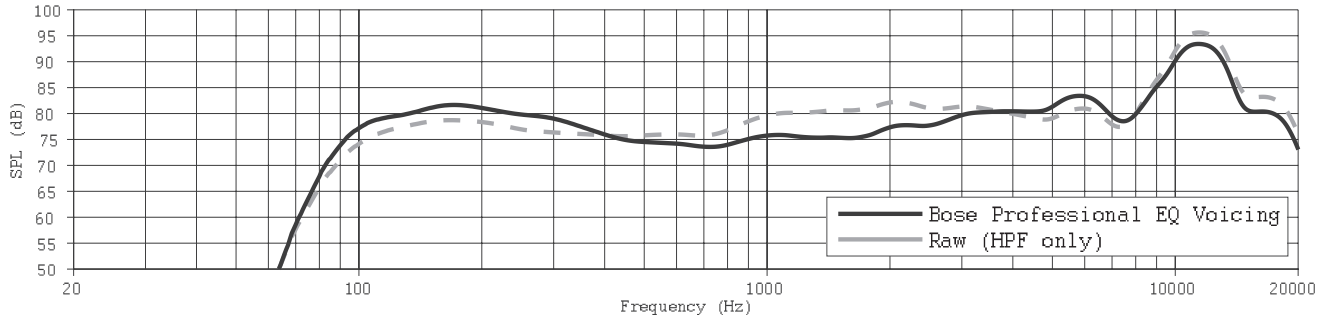

## Impedance

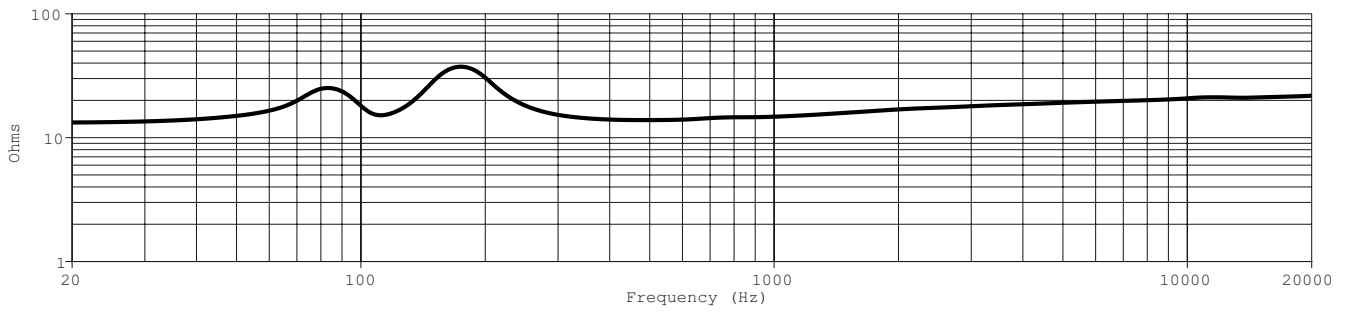

## Beamwidth<sup>6</sup>

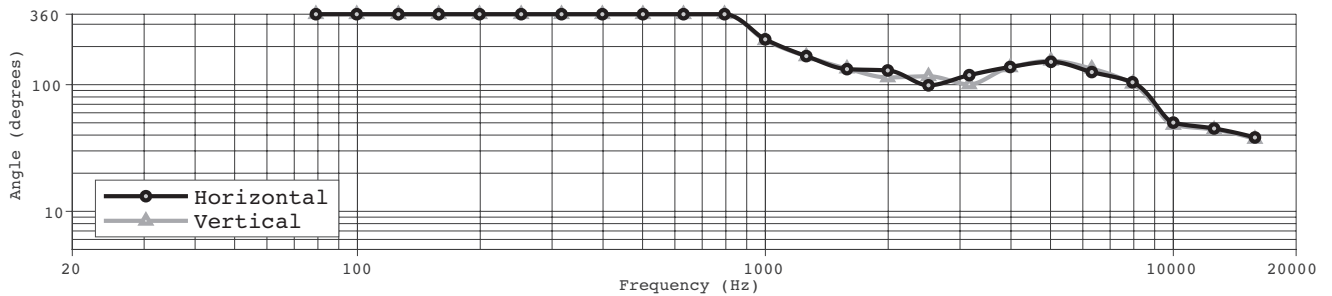


6. Measured in whole-space environment.

TECHNICAL DATA



# FreeSpace FS2P

pendant loudspeaker


## Dimensions<sup>7</sup>




**Side View**



**Front View**  
GRILLE REMOVED FOR CLARITY



**Right View**  
DIMENSIONS APPLY TO BOTH SIDES



**Rear View**  
TOP CAP REMOVED FOR CLARITY

7. Dimensions are shown in millimeters over inches.

Bose is a trademark of Bose Corporation. DesignMax, FreeSpace, and SmartBass are trademarks of Transom Post OpCo LLC. All other trademarks are the property of their respective owners. ©2024 Transom Post OpCo LLC. All rights reserved.

For additional specifications and application information, please visit [BoseProfessional.com](https://www.boseprofessional.com). Specifications subject to change without notice. 09/2024