

# Repeater unit



## Features:

- Utilizing secure Code-Hopping Encryption
- Crystal frequency stability controlled within +/- 100KHz
- No Programming required
- 8 different send signal time settings which are jumper selectable
- Intelligent multiple signal receive with buffered time output
- 6 hour 'System Alive' test supervised signal output

## Applications:

- Shopping Centre Panic Systems
- Housing Estate Panic Systems
- Retirement Village Panic systems
- Farm Panic




Retirement Village



Signals repeated to Guard House

## Specification:

- Encryption Type:.....Code-Hopping
- Frequency - Standard:.....403.55MHz
- Special:.....433.92MHz
- Transmit Range:.....1Km line-of-Site
- Receiver Range:.....250m line-of-Site
- Voltage Nominal:.....12V DC
- Voltage Range:.....11V to 14V DC
- Dimensions (lxbxh):.....187 x 104 x 67mm
- Gross Weight:.....235 grams
- Current Draw:.....32mA
- Operating Temp:.....0°C to 49°C

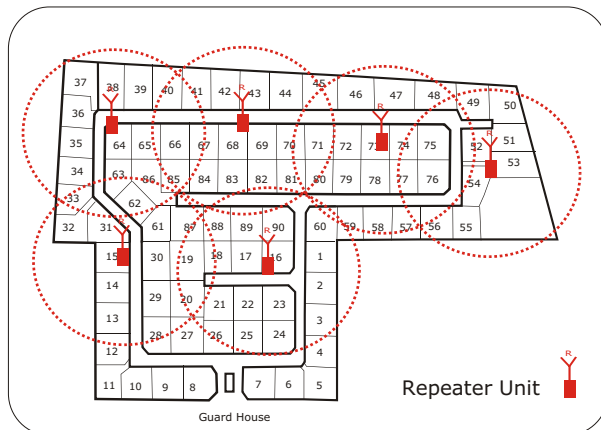

Retirement Village Site Plan

Order Code:

**Repeater Unit 12V DC**      **RPT1**