


SD series

UPoE Surge Protectors




The SD series is a surge protector keeping PoE switches, PoE PDs, and any IP device safe from lightning & other forms of electrical interference such as power surges and spikes over networking cables. There are two sub-models classified as harden-graded surge protectors operating between -40°C and 85°C during harsh weather conditions & plug-and-play surge protectors defending the surge up to 16KV. The SD-101 is deployed beside PoE switches, inside junction boxes or power boxes. Besides general specifications of SD-101, the SD-201 has IP67/IK10 rated metal enclosure to protect outdoor IP devices such as IP cameras and wireless APs.

Features

- Supports Ethernet switches equipped with GbE/FE PoE (802.3af / 802.3at / 60W UPoE / 95W UPoE)
- Protects eight wires of networking cable including PoE
- Protects up to 16KV surge
- Failure Indicator
- IP67- rated metal enclosure (SD-201 only)
- Operating temperature from -40°C to 85 °C
- Wall and pole-mounted options

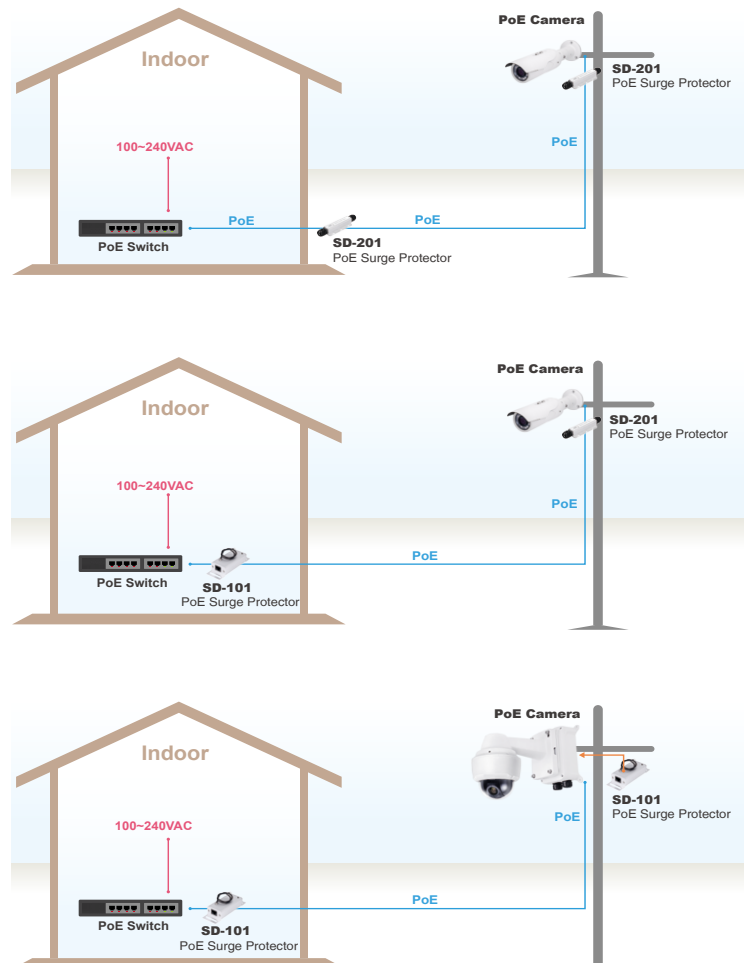

Applications



Specifications

	SD-101	SD-201
Specifications		
Number of Ports	1	1
Pass Through Data Rates	10/100/1000 Mbps	10/100/1000 Mbps
Transmission Media	Cat. 5e,6 UTP/STP	Cat. 5e,6 UTP/STP
Max Discharge Current (8/20us, 1KA per Line)	8KA,16KV	8KA,16KV
Maximum Operation DC Voltage	60VDC	60VDC
Maximum Operation DC Current	1A for 2 pair, 2A for 4 pair, 95W maximum	1A for 2 pair, 2A for 4 pair, 95W maximum
Common Mode Protection Level (10/700us)	20KV	20KV
Differential Mode Protection Level (10/700us)	4KV	4KV
Clamping Voltage (Line to GND)	600V	600V
Clamping Voltage (Line to Line)	20V	20V
Insertion Loss @ 10MHz/100MHz	1db	1db
Return Loss @ 10MHz/100MHz	-20db	-20db
Response Time	5ns	5ns
Mechanical Specifications		
Dimension (WxHxD)	80 x 40 x 25 mm	186.2 x 50 x 32 mm
Weight	0.18KG	0.27KG
Connectors	RJ45 x 2	PG16 (RJ45) x 2
Environmental Specifications		
Weather Rating	-	IP67
Operating Temperature	-40°C~ 85°C (-40°F~ 185°F)	-40°C~ 85°C (-40°F~ 185°F)
Storage Temperature	-40°C~ 85°C (-40°F~ 185°F)	-40°C~ 85°C (-40°F~ 185°F)
Operating Humidity	5% ~ 95% non-condensing	5% ~ 95% non-condensing
Certifications		
EMC	CE, FCC, VCCI, C-Tick	CE, FCC, VCCI, C-Tick
Surge	ITU-T K.21 IEC-61643-21 IEC-61000-4-5 TIA-968-A (FCC Part68)	ITU-T K.21 IEC-61643-21 IEC-61000-4-5 TIA-968-A (FCC Part68)

Ordering Information

Surge Protectors			
	<p>SD-101</p> <ul style="list-style-type: none"> Indoor 1 Port 10/100/1000Mbps, 16KV Surge Protector 		<p>SD-201</p> <ul style="list-style-type: none"> Outdoor 1 Port 10/100/1000Mbps, 16KV Surge Protector