

DS-D5022QE-B 21.5" LED Monitor


key Features

- LED backlit technology with full HD 1920×1080
- Wide view angle: 170°(H)/160°(V)
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction
- Multiply inputs: HDMI, VGA, audioin
- VESA stand bracket

Model:

DS-D5022QE-B

Physical Interface:

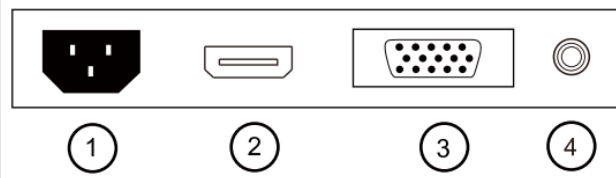

NO.	Description
1	Power Interface
2	HDMI input interface
3	VGA input interface
4	Audio input interface



DS-D5022QE 21.5" LED Monitor



Specification

Model	DS-D5022QE-B
Display	
Display Type	LED-Backlit TFT LCD
Screen Size	21.5"
Pixel Pitch(H×V)	0.24825mm × 0.24825mm
Max Resolution	1920 × 1080
Brightness	250cd/m ² (Typical)
Contrast	1000:1
Response Time	5ms
Color	16.7M
Viewing Angle	Horizontal 170°, Vertical 160°
Input	
HDMI	HDMI × 1
VGA	VGA × 1
Mounting	
VESA	100mm × 100mm
General	
Power Supply	AC 100 ~ 240V, 50 - 60Hz
Consumption	< 30W(on) < 0.5W(Standby)
Operation Temperature	0°C ~ 40 °C
Operating Humidity	10%~85% (No Condensation)
Storage Temperature	-20°C ~ 60°C
Storage Humidity	5%~95% (No Condensation)
Dimension (W×H×D)	511.4mm × 313mm × 45.4mm
Weight	4.5Kg(Gross weight) , 3.4(Net weight)