



60260: 8 CORE SECURITY CABLE

Construction Parameters:

Conductor:8C×14/0.20mm±0.005mm BC-Bare Copper

Insulation:1.5mm ± 0.10mmPVC


Insulation Color: Red, Blue, White, Black, Yellow, Green, Brown, Purple.

Ripcord: Yes.

Sheath:6.4mm ± 0.2mm PVC White

Nom. Thickness:0.65 mm

Min. Thickness:0.60 mm

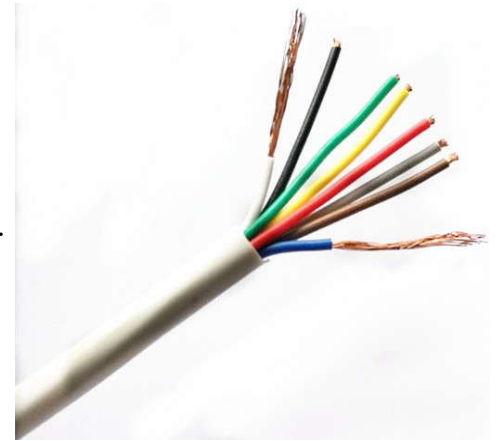

Mechanical Properties (20°C) :

Rate Voltage	300V
Rate Temperature	-15℃ up to +70℃
Conductor Resistance(DC)	≤4.9Ω/100m
Insulation Resistance(DC)	≧0.010Ω/km
Conductor breaking elongation rate	≧15%
Insulation tension	≧16MPa
Sheath tension before aging	≧10MPa
Insulation breaking elongation	≧200%
Sheath breaking elongation before aging	≧125%
Sheath breaking elongation after aging	≧100%

Package: 250M/Reel In Box

Approved :

CE, RoHS