

NEW

500m Long-Range Receiver



Features:

- ❑ Code-Hopping Encryption **KEELOQ®**
- ❑ Latch or Momentary Relay contacts
- ❑ Multiple relay times selectable (1sec;3sec;1min;3min)
- ❑ On-board Buzzer sounds on activation
- ❑ Crystal frequency-controlled within +/- 100KHz
- ❑ Frequencies available are 403.55MHz and 433.92MHz
- ❑ 12V or 24V power input requirement
- ❑ Weatherproof housing allows for outdoor mounting
- ❑ Screw-on 1/4 wave-length antenna is supplied with unit
- ❑ The unit can be "Defaulted" via the program jumper

Specifications:

Encryption Type:.....Code-Hopping **KEELOQ®**

Receiving Range:.....500m (Open air)

Frequencies:.....403.55 & 433.92MHz

Memory Capacities -

1-Channel Receiver:.....32 Remotes

4-Channel Receiver:.....32 Remotes per Channel

Voltage Range:.....9.8V to 26V DC

Dimensions (lxbxh):.....187 x 104 x 67mm

Gross Weight:.....235 grams

Current Draw:.....11mA

Operating Temp.:.....-7°C to 65°C

Warranty:.....5 Years

Release Date:.....June 2009

Applications:


Gate and Garage Door Access Control

Panic Activation

Arming / Disarming Alarm Systems

Switching On / Off Security Lighting

Machinery Control

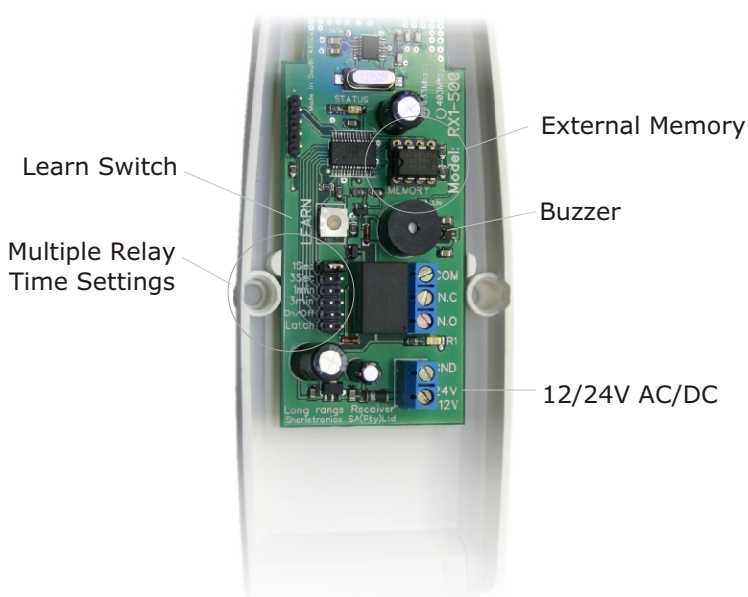

Order Codes:

1-Channel Receiver 64-User Multi-Relay Function:.....**RX1-500**

4-Channel Receiver 32-Users per Relay:.....**RX4-500**