
## **IPECS EHS - LED INDICATIONS**

LED Color	Description
White	indicates that the data transceiver is disconnected between the device and EHS Adaptor.
Red	indicates that the link is disconnected, or data communication is failed between device and EHS Base Set (such as Plantronics or Jabra). If you experience this problem, we suggest you turn Off the power of EHS Base and turn on again.
Green	indicates that the EHS Adaptor protocol type is set with KTS, or EHS Base Set is in standby mode or during a call.
Blue	indicates that the EHS Adaptor protocol type is set with SIP, or EHS Base Set is in standby mode or during a call.
$Red \longleftrightarrow Blue$	EHSA is in mode to discover Sennheiser EHS.

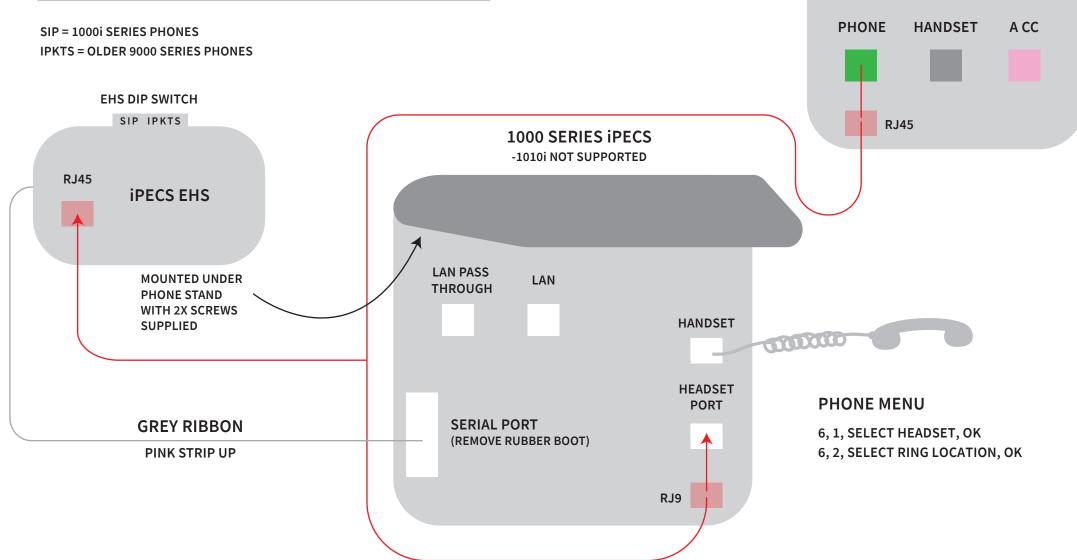

**HEADSET BASE** 

1 2 3 4 5 6

**D & DW SERIES** 

**DIP SWITCH 1 DOWN ON** 

SDW DIP SWITCH 1 ON MIDDLE POSITION